


# Cabin Air Filter Installation Instructions

1. Lift hood.
2. Locate panel on passenger side by windshield. A label on the panel identifies it as housing the filter.
3. Remove (2) screws (ATP Part No. FX-507) and remove cover.
4. Lift out old filter from its housing.
5. Fit new filter in housing and replace the cover.

*Approximate Installation Time: 25 Minutes*

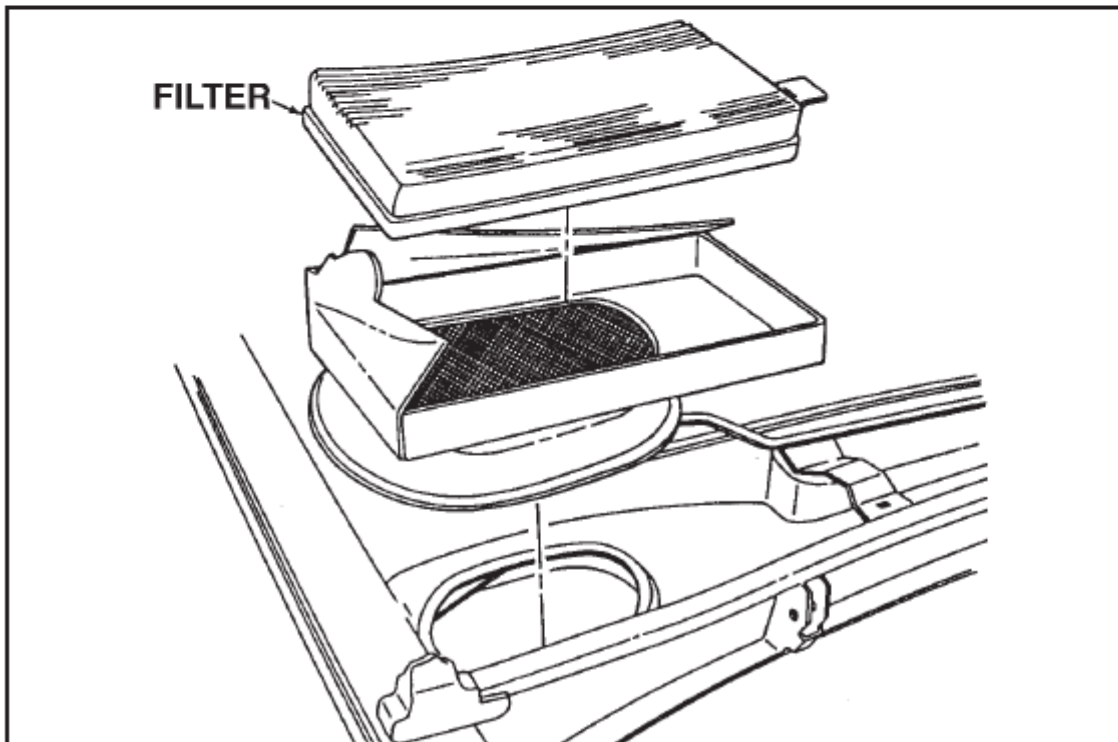

**atp**  
professional auto parts®

1300 Pratt Boulevard  
Elk Grove Village, Illinois 60007  
Tech Help Line: 1-800-528-6695  
[www.atp-inc.com](http://www.atp-inc.com)

Form No. FA2-CF12.FA4-CF14