


Cabin Air Filter Installation Instructions


Model Years 1996-99

1. Loosen the screws (ATP Part No. FX-503) on the grille.
A quarter-turn will release the screws.

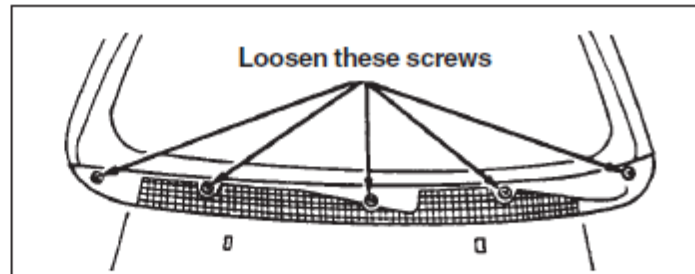

2. Open the hood. Remove the clips (ATP Part No. FX-501) that hold the grille, separate the two halves and remove the grille.

3. Remove the splash guard. (2) $\frac{5}{16}$ " bolts (ATP Part No. FX-506) secure the guard.

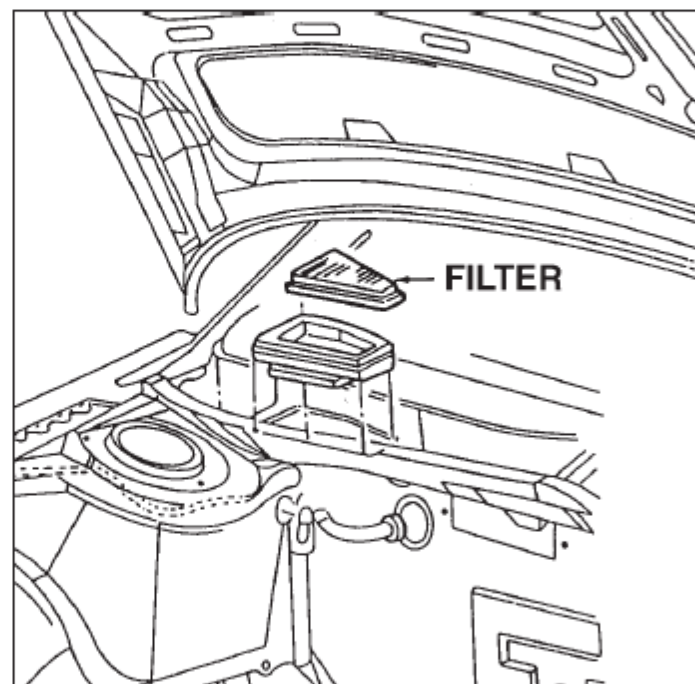

4. The filter is in a housing at the back of the engine compartment, on the left side. Slide out the filter.
5. Install the new filter. Reinstall the splash guard.
6. Replace the grille and clips.

Approximate Installation Time: 25 Minutes

atp
professional auto parts®

1300 Pratt Boulevard
Elk Grove Village, Illinois 60007
Tech Help Line: 1-800-528-6695
www.atp-inc.com


Form No. FA1-CF11

Cabin Air Filter Installation Instructions


Model Years 2000-06

Interior Ventilation Filter Is Located Underneath Passenger Side Cowl Cover

1. Remove (3) cowl cover retaining clips (ATP part no. FX-501) and remove cover.

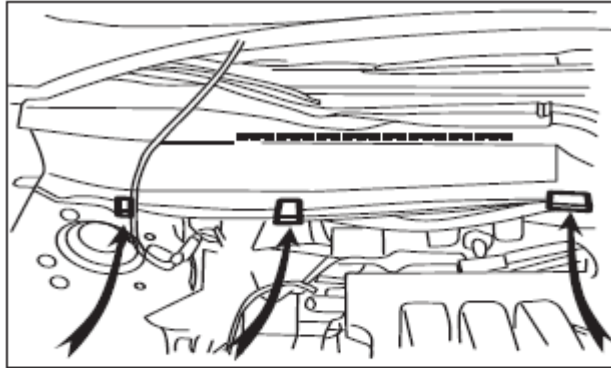


2. Remove (2) hex screws from water shield and remove the shield.

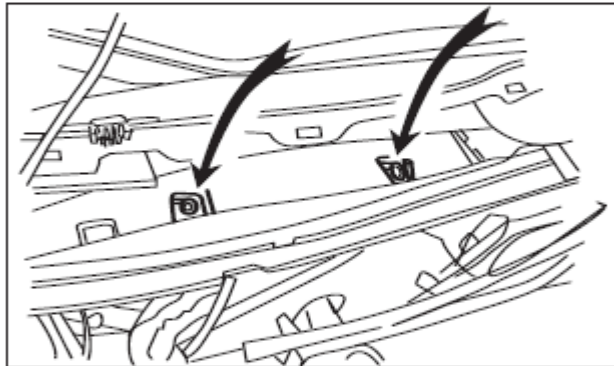

3. Lift up on filter and pull out towards the front of the vehicle.

4. Installation is in the reverse order of removal.

*Approximate Installation Time:
25 Minutes*

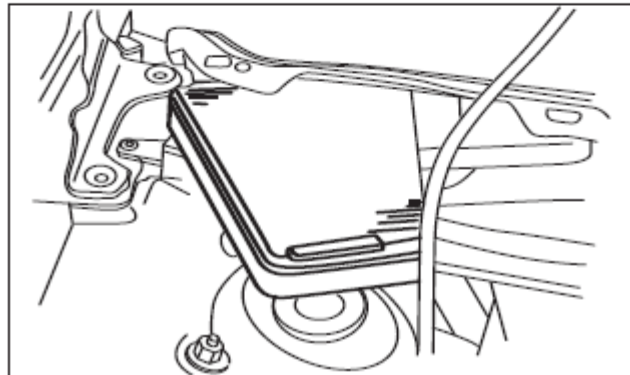

atp
professional auto parts®

1300 Pratt Boulevard
Elk Grove Village, Illinois 60007
Tech Help Line: 1-800-528-6695
www.atp-inc.com

Form No. FA1-CF11