



Cabin Air Filter Installation Instructions


1. Remove the plastic caps (ATP Part No. FX-500) from the screws on the grille. Remove the screws (ATP Part No. FX-502).

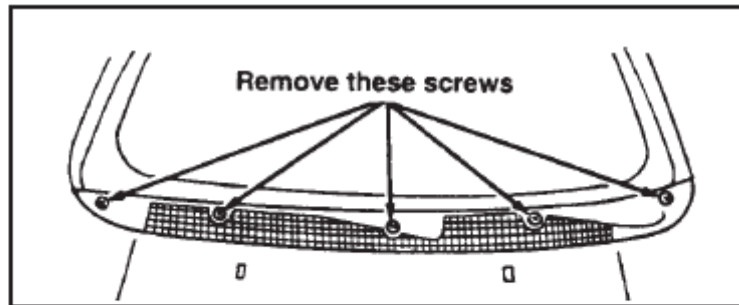

2. Open the hood. Pull off the rubber weatherstrip at the back of the engine compartment. Remove the screws (ATP Part No. FX-505) that hold the grille, separate the two halves and remove the left grille.

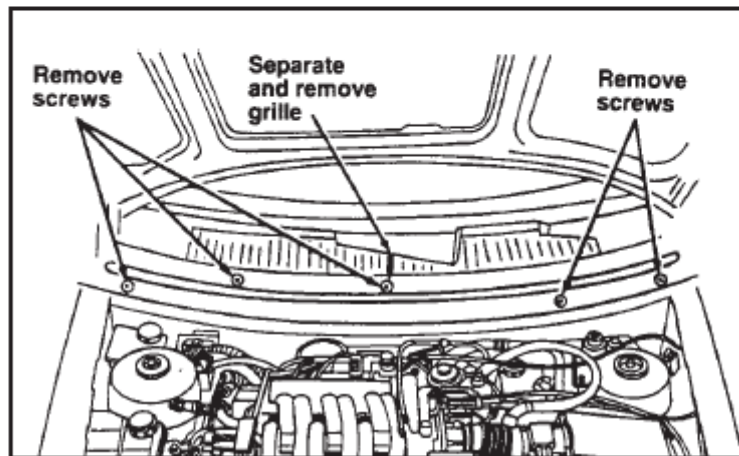

3. The filter is in a housing at the back of the engine compartment, on the left side. Pull off the two clips on the sides of the housing. Slide out the housing and filter.

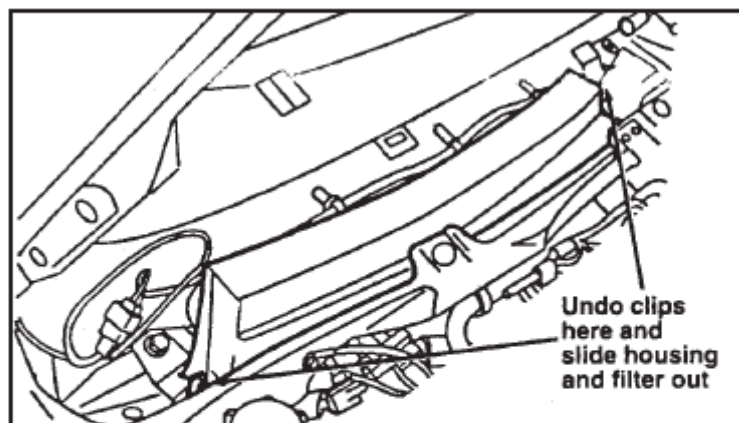

4. Slide the filter out of the housing, replace with the new filter, and slide the housing and passenger compartment air filter back into place. Reinstall the clips on the housing.

5. Replace the grille.

Approximate Installation Time: 25 Minutes

atp
professional auto parts®

1300 Pratt Boulevard
Elk Grove Village, Illinois 60007
Tech Help Line: 1-800-528-6695
www.atp-inc.com

Form No. FA3-CF13