


# Cabin Air Filter Installation Instructions

Filter element is located under passenger side cowl cover.

1. Turn ignition to the on position.
2. Turn windshield wipers on, once windshield wipers point up, turn ignition off.
3. Open hood.
4. Remove (5) retaining pins (ATP Part No. FX-508) from passenger side cowl cover, remove cover.
5. Remove filter element by sliding the filter up.
6. Install new filter and cowl cover in the reverse order of removal.
7. For Lincoln LS applications, reset the A/C Filter Life on the message center of the instrument panel by doing the following. With the key in the RUN position, scroll through each of the system messages by pressing the **STATUS** button located above the radio until you reach "A/C Filter Life". Press the **RESET** button located above the radio.

*Approximate  
Installation Time:  
25 Minutes*

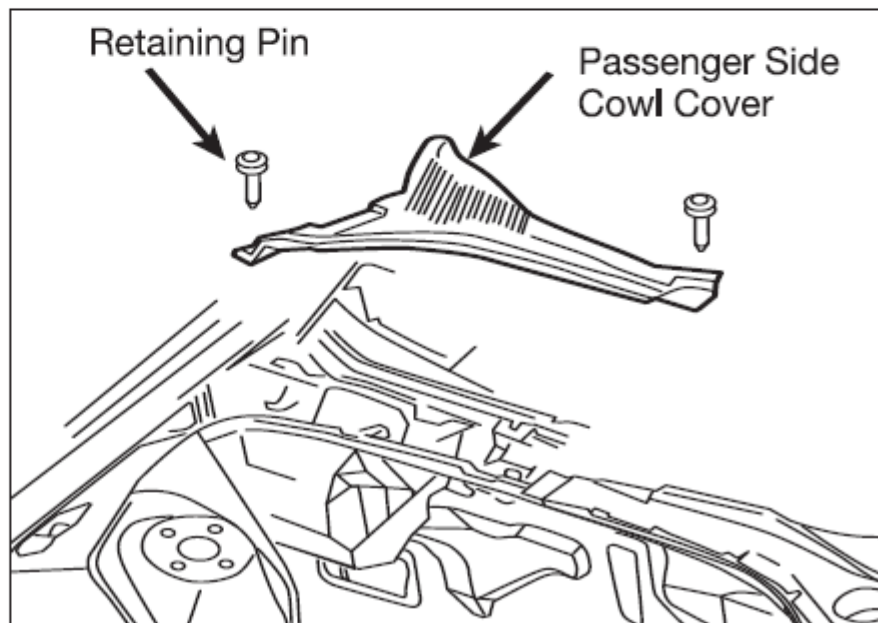

**atp**  
professional auto parts®

1300 Pratt Boulevard  
Elk Grove Village, Illinois 60007  
Tech Help Line: 1-800-528-6695  
[www.atp-inc.com](http://www.atp-inc.com)

Form No. FA8-CF18